



TECHNICAL DATA

2025-26



General Notes	1
Technical Data	3

Interior Design Solutions
Exclusive Distributor Americas

01 belbien General Notes

English

BELBIEN Composition and Benefits

BELBIEN is best characterized as an architectural design film, and is made primarily from PVC (Polyvinyl Chloride). It is sometimes referred to as a cladding or a vinyl laminate. Following are some of the many benefits that make BELBIEN the perfect solution to many decorative problems.

Pattern Selection

- Hundreds of patterns are available within the BELBIEN series, each of which is stocked by C.I. TAKIRON Corporation.

Weight

- BELBIEN is lighter than most decorative products available in the market today weighting less than 370 grams per linear meter (11.7 ounces per linear yard). This is critical for projects where weight is major factor such as elevators, movable partitions, office dividers, etc.

Thickness

- Each of the BELBIEN series is only about 0.2mm (0.008") thick excluding the release paper. Because the thickness of BELBIEN is comparable to a good coat of paint, BELBIEN can be used for such renovations as store fixtures, doors and frames, cabinets, elevator doors, etc.

Width and Length

- BELBIEN is packaged in rolls, about 1.22 meters (48") wide and 50 meters (54 yards) long. This enables BELBIEN to be applied to most doors and partitions without creating seams.

Flexibility and Conformability

- BELBIEN can be applied to many two-dimensional decorative surfaces and tailored to a 90 to 180 degrees angle for such uses as doorframes, moldings, handrails, cabinet doors, store fixtures and panel projects. Many of the BELBIEN patterns can also be stretched to conform to three-dimensional surfaces by Certified Installers. This allows BELBIEN to be applied to many decorative surfaces with bull-nose edges as well as concave and convex surfaces. CM, FM and Silky Suede series (MT) cannot be stretched.

Pressure Sensitive Adhesive System

- BELBIEN's adhesive system is one of the most remarkable features of the project. It will cure to its optimum bonding strength in just 8-12 hours following the application at 23°C(72°F). This strong adhesive system also allows BELBIEN to be installed in high-risk areas such as subways, shopping malls, bathroom partitions, etc.

Fire and Smoke Ratings

- BELBIEN meets very high standards and carries Class A (Class 1) fire and smoke ratings. As such, BELBIEN can be installed in high-risk areas such as elevators, public transportation, health care facilities, airports, restaurants, office complexes, cruise and marine, etc. Actual fire ratings include UL-723 (ASTM-E84).

- Certification For Shipbuilding Interior Use

			Certificate Number	Applicable Category
MED (DNV NB:0575)	EC-TYPE Examination Certificate (Module B)	Surface Materials and Floor Covering with Low Flame-Spread Characteristics: Decorative Veneers.	MEDB00002YM Rev.2	Excluding BWH,CM,EA,EC,EF,EM,ES,EW,FM,GC,MT
	QS-Certificate of Assessment-EC (Module D)	Quality System for the Products.	MEDD00000XH Rev.4	

- Certification For Building Interior Use

		Specification / Standard / Method		Performance	Certificate Number	Applicable Category
UL (Underwriters Laboratories Inc.)	Wall Coverings	UL723 (ASTM E-84)	Surface Burning Characteristics for Building Materials.	Class A (Class1) Only cement board substrate.	R13290	A,BC,BR,BWH,C,CM,CO,CY, DA,EA,EC,EF,EM,ES,EW,F, FM,K,MA,NC,PR,S,SW,TX, W,WA,WB,WR
	Cladding Materials for Fire Doors and Frames	ANSI/UL10C	Standard for Positive Pressure Fire Tests of Door Assemblies.	Wood/Metal Composite : 1hrs	R21680	A,BC,BR,C,CO,CY,DA,F,K, MA,NC,PR,S,SW,TX,W,WR
	Cladding Materials for Fire Doors and Frames	ANSI/UL10B	Standard for Fire Tests of Door Assemblies.	Wood/Metal Composite : 1hrs		*Please contact us for the target part numbers.
CE marking (Element Materials Technology Rotterdam BV. NB:2812)	Wall Coverings	EN 15102: 2007+A1:2011	EN 13501-1	B-s1, d0 Only cement board substrate.	2812-CPR-KA7735	EA,EC,EF,EM,ES,EW
					2812-CPR-KA7736	A,BR,C,CO,CY,S,W,WR, BC,F,NC,PR,K,TX,DA, SW,MA,WA,WB
					2812-CPR-KA7737	BC,F,NC,PR,K,TX
UKCA marking (Warringtonfire Testing and Certification Limited. NB:1121)	Wall Coverings	EN 15102: 2007+A1:2011	EN 13501-1	B-s1, d0 Only cement board substrate.	1121-CPR-UK-KA7739	EA,EC,EF,EM,ES,EW
					1121-CPR-UK-KA7740	A,BR,C,CO,CY,S,W,WR, BC,F,NC,PR,K,TX,DA,SW,MA, WA,WB
					1121-CPR-UK-KA7741	BC,F,NC,PR,K,TX

Stain Resistance

- BELBIEN offers excellent stain resistance to many substances as included in the Technical Data. In most cases, stains can be easily removed using a soft cloth and household cleaner such as dishwashing liquid. In other cases, a solution of denatured alcohol will generally remove the stain.

Exterior Application

- EA,EC,EF,EM,ES,EW (BELBIEN EX[®]) can be applied to exterior surfaces that are made of metals that remain stable during climate changes, but is not recommended for wood surfaces in an exterior environment. Common exterior uses are metal signs, columns, doors and store facades.

Reparability

- One of the greatest advantages of BELBIEN is that damages can be easily repaired. Further, a minimal down-time is required for renovation projects such as elevators, shopping malls, airports, etc. Often, this is the greatest benefit of all as the cost of down-time can be a large part of any renovation.

Custom Color Matching

- Because of their many printing cylinders, C.I. TAKIRON Corporation is able to provide custom color matching. Though there are minimum production requirements, this gives customers great flexibility for customized projects.

01 belbien General Notes

English


Hybrid Type Adhesive

- Many of the BELBIEN patterns are using the hybrid type adhesive. This adhesive system simplifies the removal of air during the application as compared to the flat type adhesive. Although ordinary pressure must still be applied to the hybrid type adhesive, the air left between BELBIEN and the substrate is less appreciable than in the case of the flat type adhesive.

The measure for VOC reduction

- Formaldehyde and chlorpyrifos are not used.
Toluene, xylene, ethyl benzene, and styrene are not used as raw material.

How the Hybrid Type Adhesive Works

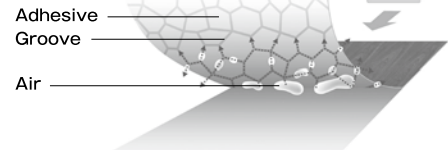

Air trapped between the BELBIEN and the substrate exits through specially designed narrow grooves as pressure is applied with the squeegee.

BELBIEN Series Selection

Carefully choose the right series of BELBIEN for your application. Depending on the application and substrate, the finished appearance may be affected.

Specify your choice of colors and patterns after reviewing the characteristics below :

Notwithstanding the availability of the below specific series applicable for exterior or "interior plus" use, Belbien is basically designed and manufactured for interior use.

Heat and Sunlight

- Because BELBIEN is made of plastics, do not install places where the temperature exceeds 50°C(110°F) or falls below -10°C(14°F) continuously. For exterior installation, choose from Belbien with ☀ mark. Even when it is for interior installation, cautions against sunlight must be used for such opening areas as windows. Be sure to choose from Belbien with ☀ mark. Cares are also needed against UV emitted from such source as lighting apparatus.
- BELBIEN with ☀ mark : Can be used both for exterior and interior installation. When used for vertical applications, expected durability in terms of color-fastness is approximately 10 years (this is based upon representative values obtained from representing actual installations in Japan, not the value for any warranty purposes).
- The expected durability in terms of color-fastness may vary when used out of perpendicular or horizontally. Environmental factors such as hours of sunlight, climates and locations of sites may affect as well.

Water and Moisture

- Although BELBIEN provides sufficient durability against water, substrates affected by deterioration such as rust may cause delamination of BELBIEN or other problems. Adequate waterproofing primers should be used on the substrate as well as the overlap bonding technique for seaming.

Durability

- BELBIEN's durability is unmatched by many other decorative products; however, BELBIEN should not be used in areas of abuse by sharp objects such as keys, knives, belt buckles etc. BELBIEN can be scratched or scored just as most other decorative materials including marble, stone, stainless steel, high pressure laminates and glass.

Substrate Color and texture

- Because some BELBIEN have low opacity, confirm that the color of the substrate will not alter the appearance of the finished project. Uneven or textured substrates also may affect the finish of glossy or smooth finish patterns. A trial installation should be performed to confirm the result.

PVC Mark

- By Japanese law, a PVC mark is lightly printed on the reverse of the BELBIEN. This mark may be visible if BELBIEN is back-lit.

BR,CO,CY,MA

- Depending upon the lighting angle, strips of BELBIEN may appear to look different with each other in color. Avoid reversing strips during the installation to minimize the change in pattern and/or texture direction. Detailed surface preparation makes the reflection from lighting on the BELBIEN surface less appreciable.

CM,FM

- Due to the metallic layer, these series are not suitable for 3D applications. Avoid storing where relative humidity is more than 80%. (Notes for Urushi series also apply.)

MT (Silky Suede series) SF

- Due to the metallic layer, these series are not suitable for 3D applications. Avoid storing where relative humidity is more than 80%. (Notes for Urushi series also apply.)

Maintenance

- Use a soft cloth with a light neutral detergent such as dishwashing detergent to clean the surface of BELBIEN. Rinse the detergent from the surface using clean water. Do NOT use any detergent with abrasives. Also, avoid using solvents such as thinner or toluene. When stains are difficult to remove, wipe using a soft cloth with petroleum benzene or denatured alcohol. BELBIEN EX ☀ series (EA,EC,EF,EM,ES,EW) can be cleaned with solvents such as lacquer thinner or acetone in some cases when used sparingly.

IMPORTANT : It is always recommended that a test area be cleaned first when using any strong solvent to make sure that there is no adverse reaction.

Products Warranty

- C.I. TAKIRON Corporation ("MANUFACTURER") warrants that Belbien ("PRODUCT") will be manufactured free from defects and will remain free from defects for a period of 2 years from the date of receipt of PRODUCT, unless exposed to excessive abuse, or abnormal conditions such as floods, fire, or other acts of God. Such warranted defects include: reduced gloss, developed texture, decomposition, swelling, clouding, tackiness, crazing, bubbling, and cracking of PRODUCT.
- THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, OR IMPLIED, WRITTEN OR ORAL, AND SHALL CONSTITUTE THE SOLE AND EXCLUSIVE REMEDY OF PURCHASER AND LIMIT OF MANUFACTURER'S LIABILITY FOR ANY AND ALL CLAIMS, LOSSES, DAMAGES, OR EXPENSES OF PURCHASERS. BECAUSE OF THE STRONG ADHESIVES REQUIRED TO INSTALL PRODUCT, REMOVAL OF PRODUCT MAY CAUSE DAMAGE TO THE ORIGINAL SUBSTRATE.

Product Size

Width : 1220mm	48 inches
Length : 50m/roll	54 yards/roll
Thickness : ca.0.2mm *	ca.0.008 inches *

* Excluding the release paper

Dimensional Stability

The cut width expansion is within 0.3mm (0.012")

☐ Install BELBIEN on an aluminum plate with cut in the center in the size of 200mm×200mm(7.874"×7.874"). The plate is put in an oven for 2 hrs. -20°C(-4° F) and 70°C(158° F) ten times.

Adhesion Durability After Heating

No adhesion degradation after being left in an atmosphere at 70°C(158°F) for 1 month.

Adhesion Stability Under Moisture

No adhesion degradation after being left in an atmosphere at 45°C(113°F) and RH at 95% for 1 month.

Color Fastness

EA,EC,EF,EM,ES,EW(BELBIEN EX ☼) No appreciable change after 5000hrs. The other BELBIEN No appreciable change after 300hrs.

☐ Sunshine Carbon Arc Weathering Test (ISO 4892-4)

Abrasion Resistance(Excluding EX, DA, and SW)

Abrasion ends at 7000 cycles.

☐ Taber Abrasion Test

CS-17 wheel loaded with 1kg (2.2 pounds) weights

Stain Resistance

Stain can be removed with neutral detergent or ethyl alcohol after direct contact with the following substances for 24 hrs.

(Excluding BWH, SW, DA, MA, MT, WA, WB)

☐ Tea	☐ Sauce
☐ Coffee	☐ Salad oil
☐ Green tea	☐ Hydrochloric acid (10%)
☐ Vinegar	☐ Sodium hydroxide (10%)
☐ Soy sauce	☐ Saturated calcium hydroxide

Residue of Oil-Ink Marker and Shoe Polish can be removed from EA,EF,EM,ES,EW(BELBIEN EX) with neutral detergent or ethyl alcohol.

Chemical / Solvent Resistance

Test Result	Type of Chemicals / Solvent
No change	Petroleum Benzene
	Ethyl Alcohol
	Ammonia Water
	10% HCL
	10% NaOH
Change on surface	Toluene
	Ethyl Acetate
	Methyl Ethyl Ketone

* EA,EC,EF,EM,ES,EW(BELBIEN EX) is not damaged by all of the above-mentioned chemicals/solvents.

☐ Drop the above-mentioned chemicals on BELBIEN and leave it on a watch dish for 6 hrs. before flushing the surface with water for final evaluation. (ISO 4586-2)

Heat Cycle Durability

Neither delamination or significant color change is observed.

☐ Install BELBIEN in the size of 200mm×200mm(7.874"×7.874") on an aluminum plate.

Left them for 2 hrs. at -20°C(-4°F) and 70°C(158°F) ten times. Then check the adhesion and color change.

Anti-crack Under Low Temperature

No crack observed after being left in an atmosphere at 0°C(32°F) for 24 hrs.

Anti-mold properties

Anti-mold properties testing (by JIS Z 2911 : 2010)

☐ No growth of molds is observed visibly and under microscope.

Bonding Strength

	With Primer	No Primer
Plywood (Lauan)	40.18	-
Plywood (Basswood)	45.25	-
Plaster Board	5.33 *1	-
Silicate Calcium Board	46.08	-
Galvanized Steel	47.04	38.22
Aluminium Plate	-	29.40
Stainless Steel	-	31.36
Acrylic Board	-	32.34

☐ After 24 hrs. of adhesion onto each of the above-mentioned substrate, peel BELBIEN off the substrate at 180° angle (N/25mm wide). *2

* 1. Destroy the substrate.

* 2. Those value is of BELBIEN W-216.

Each value slightly differs according to the type of BELBIEN.

* 3. It is not recommended for application to the following substrates due to the possibility of adhesion failure.

Copper, tin, lead, brass, solid wood, laminated wood

BELBIEN is produced under very strict quality control, however color and glossness may vary slightly on each product lot. Above data are based on measured values and not guaranteed values.

04 Features of Belbien and Precautions for Selection and Installation

Product Number	Features	Caution for Surface Scratches	Caution for Bending Installation	Caution for Joint Pattern Matching	Caution for Overlapping Installation	Caution for Left-Right Difference Due to Reflection	Caution for Installation in Wet Areas	Other Precautions
A	Textures extracted from various materials and images. This is a series of abstract patterns layered together, made possible by decorative film.				● *4			
BC/NC/PR	A monochrome series with a basic appearance. It features a soft and profound expression.		●		● *4	●		◇The expression and texture differences at the joints may be emphasized depending on the light source, environment, and viewing angle.
BR/CO/CY MA/MR	Belbien that expresses the texture of metal. The expression shown by light reflection provides a texture close to metal and paint.	● MA series		●	● *4	●	● MA series	◇Avoid butt joints and use either open joints or joint bars, as differences in appearance and texture at joint sections may be accentuated depending on the light source, environment, and viewing angle. ◇Please be careful with MA product numbers, as excessive force applied to the surface during cleaning and maintenance may alter its appearance. ◇Products with the glitter effect icon (◉) among the CO product numbers may lose their glitter on the surface if they are used in areas frequently touched by hands or in areas with high maintenance frequency.
C	Textures extracted from various materials and images. This is an abstract pattern series made possible by decorative films, allowing patterns to be layered.			● *3				
CM/FM	The texture extracted from various materials and images. This series features abstract patterns that only decorative films can achieve by overlapping designs. This is Belbien expressing the texture of metal. It possesses high brightness achieved through metal deposition. The expression combining authentic metallic qualities with unique overlapping patterns is a texture representation characteristic of Belbien.	● *1		● *3	● *4	●	●	◇The appearance finish of the installation is strongly influenced by the underlying substrate. Please install on as smooth a substrate as possible. It is recommended to install on smooth substrates such as metal plates. When installing on inorganic board substrates, be sure to apply a sealer treatment to the entire surface. If the substrate is attacked by alkalinity due to moisture influence, the film may discolor. ◇Avoid installation on three-dimensional curved surfaces. Additionally, due to the composition of the film, it cannot be installed outdoors or in bathrooms or wet areas. ◇Due to the product composition, installation on substrates (such as polycarbonate, gypsum board) that may produce moisture, volatile substances, acids, or alkalis may result in discoloration. ◇Cut sections that are constantly exposed to moisture may cause the film to discolor. Please seal the cut sections with a sealant. ◇When performing maintenance, if acidic or alkaline cleaning agents come into contact with the cut edges, there is a risk of film discoloration. Therefore, please seal the cut edges with a sealing agent. ◇Do not store in high humidity locations. ◇The product number may emphasize the difference in appearance and texture between the left and right sides of the joints depending on the light source, environment, and viewing angle. It is recommended to avoid butt joints and use gapped installation or joint rods. ◇When using a slit cutter for butt joint installation, please be aware that the guide part may cause abrasion depending on the embossing shape, potentially affecting the final appearance of the installation. It is recommended to check with scraps before installation to ensure proper execution.
DA	The series is dedicated to exploring unique textures that can only be expressed with Belbien. It features a distinct, deep appearance that offers a sense of depth not found in other materials.	●	● *2	●	● *4		●	◇Avoid installation in areas such as bathrooms where maintenance involves using detergents containing bleaching agents, as this may alter the appearance. ◇Be cautious as rubbing the film surface with strong force may change the gloss and other expressions. ◇Compared to conventional products, the dense embossing makes it easier for fine dust and fibers from cloth wrapped around a squeegee to get into the embossing grooves, so please be careful.
EA/EC/EF EM/ES/EW belbienEX	High-performance decorative film with over 30 years of sales record and experience. It has approximately 10 years of weather resistance and can be used for both interior and exterior applications. It excels in stain resistance, chemical resistance, scratch resistance, and salt damage resistance.			●	● *4	●		◇When using for exterior applications, it is recommended to pre-install on panels at the factory. However, for on-site installation, ensure that the working environment temperature is between 10°C and 35°C, pay attention to curing, and use a dryer or similar tool for thorough installation. Avoid installation during bad weather conditions such as rain or strong winds. ◇When using for exterior applications, avoid butt joining to prevent rainwater infiltration and seal the edges with sealant. Also, avoid scratching the surface with cutters or other tools. ◇The difference in appearance and texture of the joint sections may be emphasized depending on the light source, environment, and viewing angle. It is recommended to avoid butt joints and use gapped installation or joint rods. ◇When overlapping, sand off the special fluorine treatment on the surface of the overlapping part, and then apply Belbien Primer Z undiluted. ◇The film is rigid and has low elasticity, so installation on complex curves is not recommended. Excessive stretching can cause color changes, pattern inconsistencies, and peeling after installation. ◇When using a slit cutter for butt joint installation, be aware that the guide part may cause abrasion depending on the embossing shape, which could affect the finish of the installation. Please ensure to check with a sample beforehand and proceed with caution. ◇Ensure the surface of the substrate is smooth by performing substrate adjustments before applying the film. The precision of unevenness adjustments will affect the appearance and finish after installation. ◇When installing Belbien EX on indoor ceilings, the gloss difference at the film edges may be emphasized depending on the property's light source, environment, and viewing angle. Please ensure in advance that the gloss difference at the film edges is within an acceptable level for the joint sections.
F	This series expresses a texture similar to fabric (cloth).		● *2		● *4			◇Please avoid butt joints and consider using a gap filler or joint sticks, as differences in expression and texture on the joint parts may be emphasized due to light sources, environment, and viewing angles. ◇Products with glitter effect icons (◉) among the F series may lose their glitter on the surface when used in areas frequently touched by people or areas with high maintenance frequency.

*1 To prevent surface scratches, wrap a soft cloth around the squeegee before use.
*2 When folding and applying, the texture may change or turn white, so please apply carefully while warming the film using a hairdryer.
*3 Due to the large and complex patterns, the design may not appear continuous at the joint sections. It is recommended to avoid butt joints and instead use open seams or joint rods. If butt joints are used, please ensure beforehand that the pattern misalignment is acceptable.
*4 When overlapping, sand the overlapping portions until they become smooth and apply primer.

04 Features of Belbien and Precautions for Selection and Installation

Product Number	Features	Caution for Surface Scratches	Caution for Bending Installation	Caution for Joint Pattern Matching	Caution for Overlapping Installation	Caution for Left-Right Difference Due to Reflection	Caution for Installation in Wet Areas	Other Precautions
GC belbien+TEX	To match the interior, this series has a gloss (shine) that is subdued to reduce sheen.	●	●		● *4		●	◇The surface has a protective film coating. Please remove it after installation. ◇The appearance of the finish in the installation is strongly influenced by the substrate. It is recommended to install on smooth substrates such as metal plates. Be sure to align the flow direction during installation. ◇For corners and edges, it is recommended to use a dryer, as the film is stiff. If wrinkles or sagging are stretched and applied during installation, they may later swell into ridges. ◇Please be careful, as excessive force applied to the surface during cleaning or maintenance can alter its appearance. ◇The special resin used to create a glossy texture slightly reduces the stain resistance. ◇If fingerprints become noticeable on the film surface, wipe with a soft cloth and water. ◇Three-dimensional surfaces cannot be applied.
K	A series born from the pursuit of the texture and feel of leather and fabric, characterized by a simple and universal expression.	●	●			●		◇Film surface may change its luster or appearance if rubbed with strong force, so please be careful. ◇Be cautious of changes in gloss when heating during application on three-dimensional curved surfaces. Additionally, excessive stretching may cause the film to tear, so please take care.
MT	The matte finish can suppress light reflection, creating a gentle light-filled space.		●		● *4		●	◇The special resin used to create a matte texture reduces anti-fouling properties. Avoid use around water areas. Also, please note that attaching adhesive tape or strongly magnetic magnets to the film surface may cause discoloration. ◇If dirt adheres to the film surface during or after installation, it is difficult to completely remove it. Please take appropriate measures to prevent dirt from adhering during the progress of the installation work and until the handover after installation. ◇When dirt adheres to the surface, soak a soft cloth in diluted ethanol and gently tap on the dirt to remove it. In doing so, please check the condition of the film surface (such as changes in gloss or the extent of dirt spreading) while performing the cleaning. ◇When overlapping, sand the surface of the overlapping part until it becomes smooth, and then apply Belbien Primer Z undiluted. ◇Using in areas exposed to direct sunlight for long periods may alter the matte texture. Avoid installing in areas that receive direct sunlight. ◇The material is stiff, so it is recommended to use a hairdryer when installing in corners. If you stretch and apply the film to smooth out wrinkles during installation, it may later bulge in a streak-like manner. Also, avoid installation on complex curved surfaces.
S	This series expresses the texture and feel of natural materials such as stone, sand, and stucco.	●			● *4		●	◇When excessive force is applied to the surface during cleaning or maintenance, the appearance may change, so please be careful. ◇Some product numbers have a denser embossing compared to conventional products, making it easier for fine dust and fibers from cloth wrapped around a squeegee to get into the embossing grooves, and making it difficult to remove adhered dirt. If the dirt is difficult to remove, please refer to the maintenance section on page 2.
SW	The ultimate realism. The Super Real Wood Series, with its meticulous focus on textures that closely resemble the real thing, pursues the look and feel of wood using unique techniques that create depth, expressing the texture of natural materials.	●	●		●		●	◇Avoid applying the product in areas like bathrooms where maintenance involves bleach-containing detergents, as this may alter the appearance. ◇Some product numbers have finer embossing compared to conventional products, making it easier for fine dust and fibers from cloth wrapped around a squeegee to become embedded in the embossing grooves, and it may be difficult to remove adhered dirt. If dirt is difficult to remove, please refer to the maintenance section on page 2. ◇Please be careful, as rubbing the film surface with strong force may change its gloss and appearance.
TX belbien+TEX	The "Belbien Plustex" series is convenient for adding expression to solid colors. It expresses texture solely through embossing and is available in monochrome. Compared to the solid colors of the basic color series, you can enjoy changes in expression due to light and shadow.	●	● *2	● TX030~039, TX080~085 *3	● *4	●		◇The surface scratches may become noticeable depending on the embossing. ◇For some product numbers, due to the dense embossing compared to conventional products, dust and fibers from cloth wrapped around a squeegee can easily get trapped in the embossing grooves, making it difficult to remove attached dirt. If the dirt is hard to remove, please refer to the maintenance section on page 2. ◇For TX product numbers, the embossing is coarse, so always sand until the embossing is smooth when overlapping applications. If unable to smooth with sandpaper, use an electric sander or similar. After sanding, clean the smooth film surface to completely remove sanding debris, then apply Belbien Primer Z in its undiluted form. ◇The difference in appearance and texture of the joint sections may be emphasized depending on the light source, environment, and viewing angle. It is recommended to avoid butt joints and instead use open seam installation or joint bars. ◇When using a slitting cutter for butt joint construction, depending on the embossing shape, there is a risk that friction on the guide section may affect the finish of the construction. Please be sure to check with scraps before proceeding with the construction and exercise sufficient caution.
W/WA/WB	The Standard Grade Wood Grain Series offers a wide variety of wood species. Using unique technology, we have enhanced the texture. We offer a rich variety of designs, ranging from classic patterns to unique and large-scale designs.		●		● *4		● WA series WB series	◇Please be aware that excessive force applied during cleaning and maintenance may alter the appearance of products with WA and WB item numbers. ◇WA and WB products should not be installed in areas such as bathrooms where maintenance involves using detergents containing bleaching agents, as this may alter the appearance. ◇Some part numbers have more intricate embossing compared to conventional products, making it easier for fine dust and fibers from cloth wrapped around a squeegee to get trapped in the embossing grooves, and any adhered dirt may be difficult to remove. If the dirt is difficult to remove, please refer to the maintenance section on page 2.
WR	This is a new wood grain series with a high-quality texture, featuring wood species commonly used in architectural interiors arranged in color gradations. The same pattern is available in different colors, making it easy to choose and use as a "Wood Grain Color Guide." Compared to conventional wood grain product numbers, it features a more intricate embossing expression.	●	●		● *4			◇The embossing may make surface scratches more noticeable. ◇When using a slit cutter for butt joint installation, the shape of the embossing may cause the guide to rub against the surface, potentially affecting the finish of the installation. Please ensure to check with a scrap piece before proceeding with installation. ◇Using the slit cutter for butt joint installation may affect the finish due to friction on the guide part, depending on the emboss shape. Please confirm with scraps before installation and exercise caution.

*1 To prevent surface scratches, wrap a soft cloth around the squeegee before use.
*2 When folding and applying, the texture may change or turn white, so please apply carefully while warming the film using a hairdryer.
*3 Due to the large and complex patterns, the design may not appear continuous at the joint sections. It is recommended to avoid butt joints and instead use open seams or joint rods. If butt joints are used, please ensure beforehand that the pattern misalignment is acceptable.
*4 When overlapping, sand the overlapping portions until they become smooth and apply primer.